


LED LINEAR LIGHT INSTALLATION GUIDE

Eurolumen

MODEL ELA604

CAD-SPECIFIC 1000 mm OUTDOOR LINEAR LIGHT

1

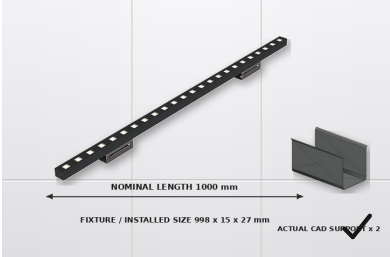

NOMINAL LENGTH 1000 mm
FIXTURE / INSTALLED SIZE 998 x 15 x 27 mm
ACTUAL CAD SUPPORT x 2

VERIFY ELA604 / 1000 mm BODY / 2 CAD SPRING CLIPS

2



CAD SUPPORT CENTRES 408.0 mm
ELA604 PRODUCT FORM / SUPPORT DATUM FROM CAD

MARK DATUM / SET 408.0 mm SUPPORT CENTRES


3



ACTUAL CAD SUPPORT
2 CAD SPRING CLIPS
FIX BOTH SUPPORTS ON ONE STRAIGHT DATUM

DRILL ANCHORS / FIX BOTH SUPPLIED CAD SUPPORTS

4

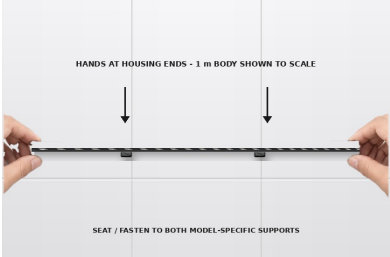

HANDS AT HOUSING ENDS - 1 m BODY SHOWN TO SCALE
SEAT / FASTEN TO BOTH MODEL-SPECIFIC SUPPORTS

SUPPORT BOTH ENDS / SECURE THE 1 m FIXTURE

5



IP-RATED CONNECTOR
TIGHTEN LOCKING RING

JOIN IP-RATED CONNECTORS / LOCK / SEAL


6



CHECK POWER / CONTROL / AIM / UNIFORM OUTPUT
POWER CONTROL OUTPUT

POWER ON / COMMISSION / FINAL CHECK

ELA604 POWER / CONTROL CONNECTION



USE ONLY THE VOLTAGE AND WIRING ASSIGNED BY THE COMPLETE PRODUCT CODE / LABEL.

1. Isolate all conductors before drilling, connection, aiming or service.
2. Confirm the substrate can support the 1 m housing and both supplied CAD supports.
3. Transfer the CAD support positions and keep both supports on one straight datum.
4. Fully engage every factory connector and tighten its locking ring by hand.
5. Commission the complete fixture; test power, control, aim and uniform output.

KEEP THE OPTICAL FACE, END CAPS, CABLE ENTRIES AND FACTORY SEALS INTACT.

ELA604 VERIFIED SOURCE DATA

MOUNTING	2 CAD SPRING CLIPS
FIXTURE / INSTALLED	998 x 15 x 27 mm
SUPPORT CENTRES	408.0 mm (CAD)
INPUT / POWER	24V / 12W 15W
BEAM / CRI	120° / Ra 80
CCT	2700K/3000K/4000K/RGB/RGBW
CONTROL	DMX512 Bluetooth ON/OFF
FINISH / BUILD	Black / Aluminum Alloy+Aluminum Snap Cover

Installation and commissioning must be performed by qualified technical personnel.

The housing proportion, support spacing and mounting geometry shown above follow the ELA604 source CAD files.

Do not substitute a generic clip or bracket; use the two supports supplied for this exact model.

For outdoor use, preserve drainage, connector sealing and service access; protection rating follows the product label.

WARNING

- DO NOT ALTER THE 1000 : 15 : 27 CAD ASSEMBLY PROPORTION OR SUBSTITUTE THE SUPPORTS.
- DO NOT CONNECT THE 24 V VERSION DIRECTLY TO AC MAINS.
- SUPPORT BOTH ENDS DURING INSTALLATION; ISOLATE POWER BEFORE AIMING OR SERVICE.



CE DMX OUTDOOR IP SEE LABEL