

LED SQUARE RECESSED DOWNLIGHT
INSTALLATION GUIDE

Eurolumen

MODEL ELX354

EXPOSED RECTANGULAR DUAL-LENS ADJUSTABLE SPOTLIGHT


1



MATCHED DRIVER
220V AC INPUT

CHECK COMPONENTS


2

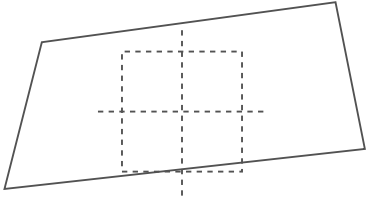

CUT-OUT 105 × 105 mm

CUT OPENING TO CONFIRMED SIZE

3



MATCHED DRIVER
220V AC INPUT

CONNECT MATCHED DRIVER

4



COMPRESS COMPLETE SPRING CLIPS

5



INSERT AND LOCK ABOVE CEILING

6



CHECK SECURE FIT / AIM / POWER ON

WIRING DIAGRAM



ON/OFF: L / N
DALI: DA / DA
0-10V: DIM+ / DIM-
BLUETOOTH: MATCHED DRIVER

FOLLOW THE TERMINAL DIAGRAM ON THE SUPPLIED DRIVER LABEL.

MOUNTING DATA

CUT-OUT	105 × 105 mm
CEILING THICKNESS	CONFIRM ON SITE
INSTALLATION TYPE	RECESSED / COMPLETE SPRING CLIP
PRODUCT SIZE	50 × 50 mm head
INPUT	220V AC VIA MATCHED DRIVER
POWER	6 / 8 / 12 / 15 W
LOCATION	INDOOR / DRY LOCATION



Installation must be performed under the guidance of qualified technical personnel.
Switch off and isolate the mains supply before installation or maintenance.
Confirm that the selected driver, dimming control and mounting dimensions match the product label.
Retain this guide with the project handover and maintenance records.



WARNING

- DO NOT INSTALL WHILE POWER IS ON.
- USE ONLY THE MATCHED DRIVER AND CONFIRMED MOUNTING DIMENSIONS.

CE RoHS INDOOR