

LED RECESSED DOWNLIGHT
INSTALLATION GUIDE

Eurolumen

MODEL ELX242

WHITE CYLINDRICAL ADJUSTABLE SPOTLIGHT; ENTIRE CYLINDER REMAINS BELOW CEILING


1



MATCHED DRIVER
220V AC INPUT

CHECK COMPONENTS


2

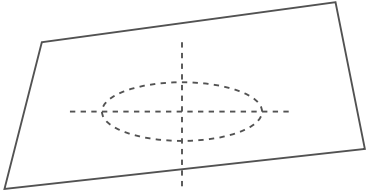

CUT-OUT Ø105 mm

CUT OPENING TO CONFIRMED SIZE

3



MATCHED DRIVER
220V AC INPUT

CONNECT MATCHED DRIVER

4



PUSH COMPLETE FLIP CLIPS UP

5



INSERT AND LOCK ABOVE CEILING

6



CHECK SECURE FIT / AIM / POWER ON

WIRING DIAGRAM



POWER SUPPLY
220V AC

MATCHED DRIVER

LED

ON/OFF: L / N
DALI: DA / DA
0-10V: DIM+ / DIM-
BLUETOOTH: MATCHED DRIVER

FOLLOW THE TERMINAL DIAGRAM ON THE SUPPLIED DRIVER LABEL.

MOUNTING DATA

CUT-OUT	Ø105 mm
CEILING THICKNESS	CONFIRM ON SITE
INSTALLATION TYPE	RECESSED / COMPLETE FLIP CLIP
PRODUCT SIZE	Ø55 x H170 mm
INPUT	220V AC VIA MATCHED DRIVER
POWER	6W / 8W / 12W
LOCATION	INDOOR / DRY LOCATION



Installation must be performed under the guidance of qualified technical personnel.

Switch off and isolate the mains supply before installation or maintenance.

Confirm that the selected driver, dimming control and mounting dimensions match the product label.

Retain this guide with the project handover and maintenance records.



WARNING

- DO NOT INSTALL WHILE POWER IS ON.
- USE ONLY THE MATCHED DRIVER AND CONFIRMED MOUNTING DIMENSIONS.

CE RoHS INDOOR