

LED RECESSED DOWNLIGHT INSTALLATION GUIDE

Eurolumen


MODEL ELX030

1




CHECK COMPONENTS

2

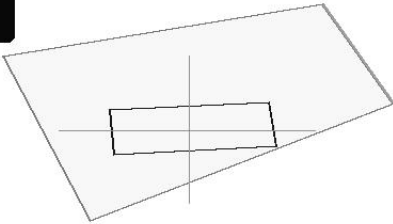

CUT OPENING TO CONFIRMED SIZE

3



CONNECT MATCHED DRIVER

4



PUSH COMPLETE FLIP CLIPS UP

5



INSERT AND LOCK CLIPS

6



CHECK FLUSH FIT / POWER ON

WIRING DIAGRAM



ON/OFF: L / N

0-10V: DIM+ / DIM-

DALI: DA / DA

Bluetooth: matched driver

FOLLOW SUPPLIED DRIVER LABEL

MOUNTING DATA



CUT-OUT: SEE SPEC

CEILING THICKNESS

TBC

INSTALLATION TYPE RECESSED / COMPLETE FLIP CLIP / INDOOR DRY LOCATION

PRODUCT SIZE 229 x 85 mm

INPUT 220V AC VIA MATCHED DRIVER

POWER 18W / 24W / 30W



Installation must be performed under the guidance of qualified technical personnel.
Switch off and isolate the mains supply before installation or maintenance.
Confirm the selected driver and dimming control match the product label.
Retain this guide with the project handover and maintenance records.

WARNING

- Do not install while power is on.
- Keep insulation and combustible material clear of the luminaire and driver.
- Use only the matched driver and confirmed mounting dimensions.

CE

RoHS

