LED LINEAR RECESSED DOWNLIGHT INSTALLATION GUIDE

Eurolumen

MODEL ELX361

MULTI-CELL LINEAR OPTIC

1

CHECK COMPONENTS

2

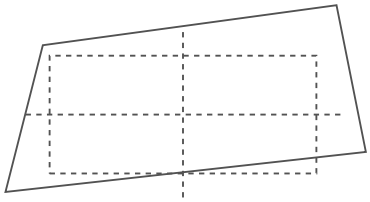

CUT-OUT 111 × 49 mm

CUT OPENING TO CONFIRMED SIZE

3



CONNECT MATCHED DRIVER

4

COMPRESS COMPLETE SPRING CLIPS

5

INSERT AND LOCK ABOVE CEILING

6

CHECK FLUSH FIT / POWER ON

WIRING DIAGRAM

ON/OFF: L / N
DALI: DA / DA
0-10V: DIM+ / DIM-
BLUETOOTH: MATCHED DRIVER

FOLLOW THE TERMINAL DIAGRAM ON THE SUPPLIED DRIVER LABEL.

MOUNTING DATA

CUT-OUT	111 × 49 mm
CEILING THICKNESS	CONFIRM ON SITE
INSTALLATION TYPE	RECESSED / COMPLETE SPRING CLIP
PRODUCT SIZE	119 × 56 mm
INPUT	220V AC VIA MATCHED DRIVER
POWER	10 W
LOCATION	INDOOR / DRY LOCATION

Installation must be performed under the guidance of qualified technical personnel.
Switch off and isolate the mains supply before installation or maintenance.
Confirm that the selected driver, dimming control and mounting dimensions match the product label.
Retain this guide with the project handover and maintenance records.

WARNING

- DO NOT INSTALL WHILE POWER IS ON.
- USE ONLY THE MATCHED DRIVER AND CONFIRMED MOUNTING DIMENSIONS.

CE RoHS **INDOOR**