

LED RECESSED DOWNLIGHT  
INSTALLATION GUIDE

Eurolumen

MODEL ELX219

TILTED OVAL BLACK APERTURE


1



MATCHED DRIVER  
220V AC INPUT

CHECK COMPONENTS


2

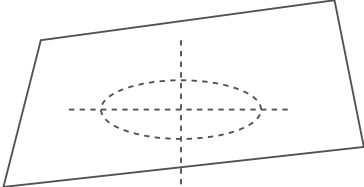

CUT-OUT Ø85 mm

CUT OPENING TO CONFIRMED SIZE

3



MATCHED DRIVER  
220V AC INPUT

CONNECT MATCHED DRIVER

4




ALIGN AND SCREW FIX MESH WINGS

5



PLASTER, SAND AND PAINT FLUSH

6

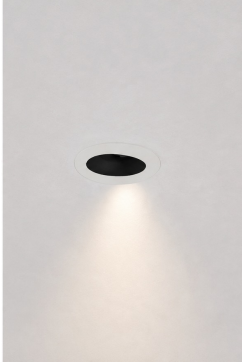

CHECK FLUSH FIT / POWER ON

WIRING DIAGRAM



ON/OFF: L / N  
DALI: DA / DA  
0-10V: DIM+ / DIM-  
BLUETOOTH: MATCHED DRIVER

FOLLOW THE TERMINAL DIAGRAM ON THE SUPPLIED DRIVER LABEL.

MOUNTING DATA

|                   |                                  |
|-------------------|----------------------------------|
| CUT-OUT           | Ø85 mm                           |
| CEILING THICKNESS | CONFIRM ON SITE                  |
| INSTALLATION TYPE | TRIMLESS / PERFORATED MESH WINGS |
| PRODUCT SIZE      | Ø85 x H112 mm                    |
| INPUT             | 220V AC VIA MATCHED DRIVER       |
| POWER             | 8W / 12W / 15W                   |
| LOCATION          | INDOOR / DRY LOCATION            |



Installation must be performed under the guidance of qualified technical personnel.  
Switch off and isolate the mains supply before installation or maintenance.  
Confirm that the selected driver, dimming control and mounting dimensions match the product label.  
Retain this guide with the project handover and maintenance records.



WARNING

- DO NOT INSTALL WHILE POWER IS ON.
- USE ONLY THE MATCHED DRIVER AND CONFIRMED MOUNTING DIMENSIONS.

CE RoHS

INDOOR