

LED RECESSED DOWNLIGHT INSTALLATION GUIDE

Eurolumen


MODEL ELX108

1




CHECK COMPONENTS

2

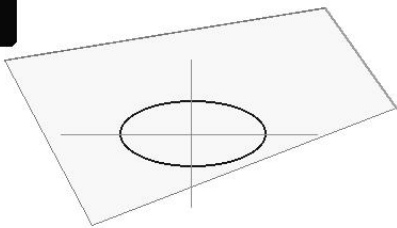

CUT OPENING TO CONFIRMED SIZE

3



CONNECT MATCHED DRIVER

4



FOLD HINGED CLAMPS UP

5



INSERT / RELEASE TO CLAMP

6



CHECK FLUSH FIT / POWER ON

WIRING DIAGRAM



ON/OFF: L / N


0-10V: DIM+ / DIM-

DALI: DA / DA

Bluetooth: matched driver

FOLLOW SUPPLIED DRIVER LABEL

MOUNTING DATA



CUT-OUT Ø TBC

CEILING THICKNESS

TBC

INSTALLATION TYPE

RECESSED / COMPACT HINGED CLAMP / INDOOR DRY LOCATION

PRODUCT SIZE

Ø140 x H146 mm

INPUT

220V AC VIA MATCHED DRIVER

POWER

25W / 30W / 35W



Installation must be performed under the guidance of qualified technical personnel.

Switch off and isolate the mains supply before installation or maintenance.

Confirm the selected driver and dimming control match the product label.

Retain this guide with the project handover and maintenance records.

WARNING

- Do not install while power is on.
- Keep insulation and combustible material clear of the luminaire and driver.
- Use only the matched driver and confirmed mounting dimensions.

CE

RoHS

