

LED OUTDOOR GARDEN LAMP

INSTALLATION GUIDE

Eurolumen

MODEL ELA007

CATENARY-SUSPENDED DISC LAMP

1




VERIFY FIXTURE / TWIN CLAMPS / SAFETY CABLE / SEALED JOINT

2




VERIFY ENGINEERED MESSENGER CABLE / MARK FIXTURE CENTRE

3

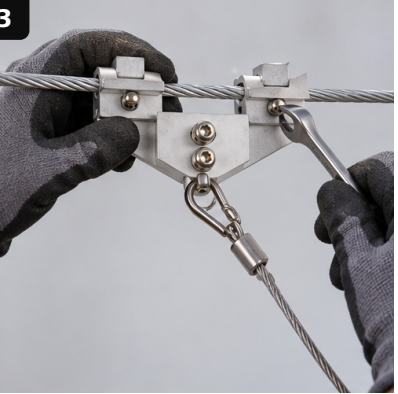


FIT BOTH SADDLES / TORQUE CLAMPS / ATTACH SAFETY CABLE

4

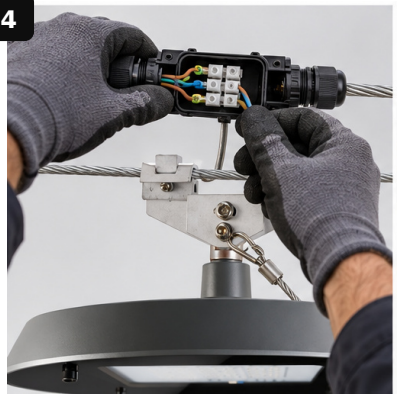


ISOLATE SUPPLY / CONNECT L-N-PE / SEAL + STRAIN-RELIEVE

5

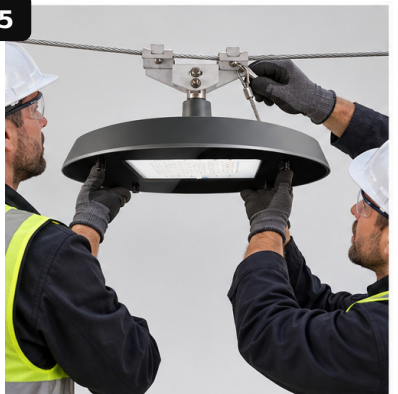

LIFT FIXTURE / LOCK TO SADDLE / LEVEL THE LIGHT HEAD

6

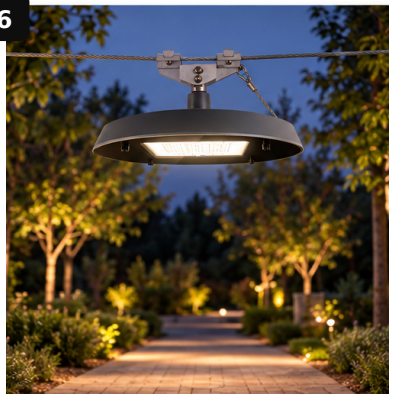

POWER ON / COMMISSION / VERIFY DOWNWARD OUTPUT

MOUNTING + POWER SEQUENCE

ENGINEERED CABLE

TWIN SADDLES

SAFETY CABLE

SEALED L-N-PE

1. Messenger cable, end supports and tension must be verified by the project structural engineer.

2. Use the supplied twin saddle assembly; never suspend the luminaire from its electrical cable.

3. Fit an independent safety cable before the fixture is released and keep the head level.

4. Keep the electrical joint accessible, weatherproof and fully strain-relieved above the fixture.

VERIFY MESSENGER CABLE, BOTH CLAMPS, SAFETY RETENTION, EARTH, SEALS AND STRAIN RELIEF.

ELA007 INSTALLATION DATA

|               |                               |
|---------------|-------------------------------|
| PRODUCT SIZE  | D500 x H235 mm                |
| INSTALLATION  | CATENARY / NO POLE FOUNDATION |
| MOUNTING      | TWIN SADDLE / MESSENGER CABLE |
| INPUT         | 220 V AC / ON-OFF             |
| POWER OPTIONS | 30-105 W OPTIONS              |
| CRI           | CRI 80                        |
| DISTRIBUTION  | T1 / T2 / T3 OPTIONS          |



Installation must be performed by qualified personnel using project-approved structural supports and fixings. Confirm model, voltage, mounting geometry, cable route and hidden services before foundation or drilling work. Isolate the supply, connect protective earth and maintain IP-rated glands, seals and accessible service joints. Commission only after the final mechanical check; retain this guide and the project structural calculations.



WARNING

- ISOLATE POWER BEFORE INSTALLATION, CONNECTION, ADJUSTMENT OR SERVICE.

- USE QUALIFIED PERSONNEL, RATED LIFTING EQUIPMENT AND PROJECT-APPROVED SUPPORTS.

CE

PE OUTDOOR