LED UNDERWATER LIGHT INSTALLATION GUIDE

Eurolumen

MODEL ELA514

LINEAR UNDERWATER LIGHT

1

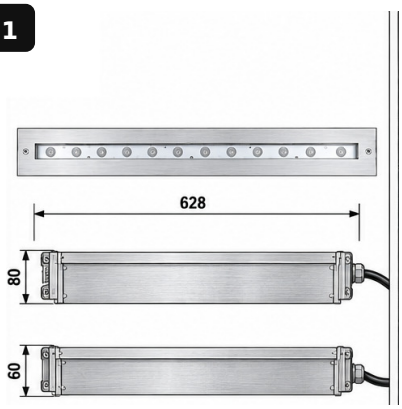

VERIFY LINEAR FIXTURE / RECESS / HARDWARE

2

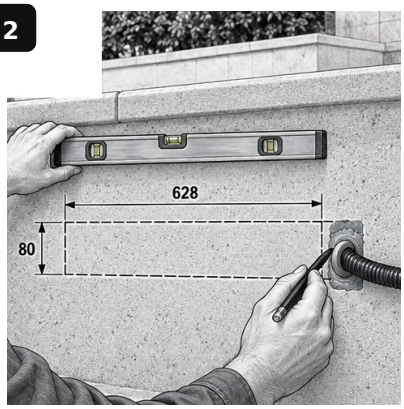

LEVEL / MARK TRUE BODY RECESS + CABLE ROUTE

3

PREPARE STRAIGHT RECESS / SEAL CONDUIT

4

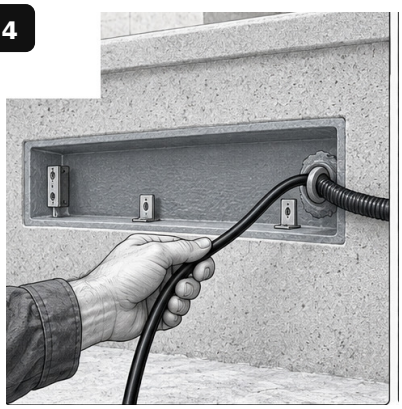

ROUTE UNBROKEN FACTORY CABLE / KEEP DRY

5

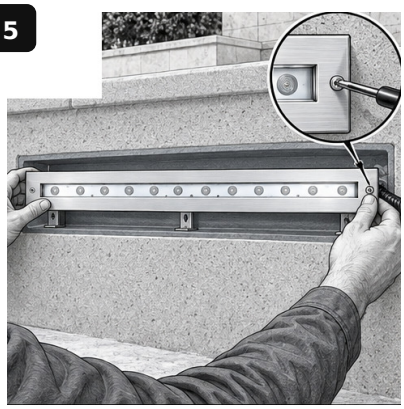

LOWER SAME FIXTURE / SEAT / TIGHTEN EQUALLY

6

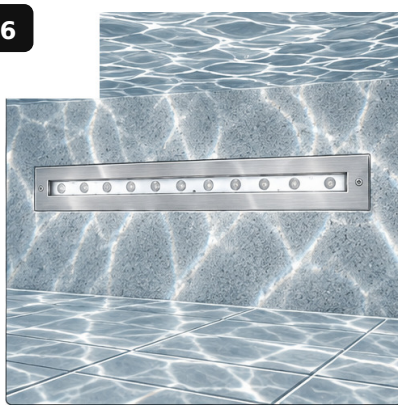

SUBMERGE / POWER ON / CHECK UNIFORM OUTPUT

WATERPROOF POWER CONNECTION

SELV DRIVER (12 / 24 V DC) → **DRY JUNCTION** (ABOVE WATERLINE) → **SEALED CONDUIT** (NO FIELD SPLICE) → **ELA514** (SUBMERGED)

1. Isolate the supply and drain the water feature before installation.
2. Keep the driver and every junction dry above the maximum waterline.
3. Route the original factory cable continuously through sealed conduit.
4. Do not make an underwater field splice or modify the supplied cable.

USE ONLY A MATCHED SELV DRIVER AND IP68-RATED CABLE ENTRY SYSTEM.

UNDERWATER INSTALLATION DATA

PRODUCT SIZE	628 × 80 × 60 mm
BODY / INSTALL	MODEL-SPECIFIC MOUNTING
INPUT	12 / 24 V DC SELV
MOUNTING	RECTANGULAR RECESS
CABLE	FACTORY SEALED
LOCATION	UNDERWATER
RATING	IP68

Installation must be performed under the guidance of qualified technical personnel.

Confirm the actual product, supplied mounting parts, cable route and driver before drilling.

Waterproofing around every recess, anchor and conduit entry must be continuous and complete.

Retain this guide with the project handover and maintenance records.

WARNING

- ISOLATE POWER AND DRAIN THE WATER FEATURE BEFORE INSTALLATION OR SERVICE.
- VERIFY MOUNTING, SEALS, CABLE AND DRY JUNCTION BEFORE SUBMERGING.

CE **SELV** **IP68**